


GTS28

双8寸二分频二驱动线阵列音箱
Dual 8" Two-Way Bi-Amp Line Array Speaker

GTS SERIES

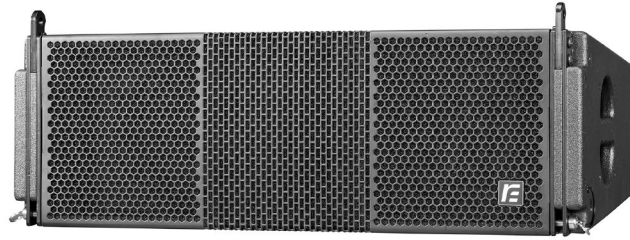

应用范围 Application


- ▶ 剧场、礼堂、演艺大厅主扩声、大会议厅、多功能厅主扩声、体育场馆扩声、中小型流动演出主扩声、大型扩声系统辅助扩声
- ▶ Stadium, Theatre, Auditorium, Banquet hall, Multi-function hall, Touring, Portable application

产品特性 Features

▶ GTS28的设计秉承了GTS系列经典的紧凑型 and 系统化高精度线性阵列独特风格, 采用1个3寸进口高音单元, 配置理想的线性声学波阵面高音号角, 实现精准及均匀的声学覆盖。采用专门用于中低频系统的新款双8寸扬声器, 全新三点式简易安装吊架件, 每组可吊挂多达16只音箱, 具备7:1的安全系数, 并且配置了四个力学优化式抽手。

▶ GTS28 applies the same design concept of flexibility in GTS series. The GTS28 applies 1×3" HF with ideal design HF horn that realize accurate all-round dispersion. It also equips a newly design hanging kits for maximum hanging 16 units.

产品尺寸 Product dimension

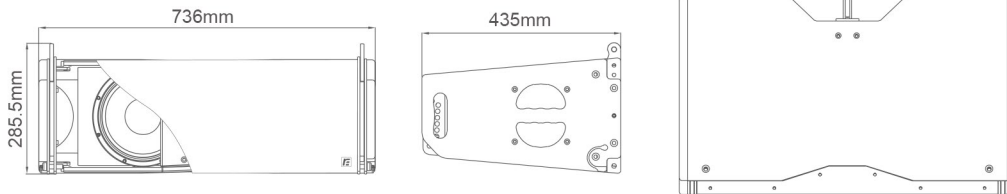

参数规格 Specifications

系统类型	双8寸二分频二驱动线阵列音箱	System type	Dual 8" Two-Way Bi-Amp Line Array Speaker
灵敏度(1W/1m)	HF:112dB/LF:100dB	Sensitivity(1W/1m)	HF:112dB/LF:100dB
频率响应	90Hz~18kHz(±3dB)/80Hz~20kHz(-10dB)	Frequency response	90Hz~18kHz(±3dB)/80Hz~20kHz(-10dB)
额定功率(AES)	HF:80W LF:300W	Power rating(AES)	HF:80W LF:300W
最大声压级(连续/峰值)	HI:131dB/137dB LOW:124dB/130dB	SPL(continuous/peak)	HI:131dB/137dB LOW:124dB/130dB
标称覆盖角(H×V)	110° ×10°	Dispersion(H×V)	110° ×10°
标称阻抗	HF:16Ω LF:16Ω	Nominal Impedance	HF:16Ω LF:16Ω
低音单元	2×8寸低音(50mm 音圈)	LF	2×8"(50mm voice coil)
高音单元	1×3寸高音(75mm 音圈)	HF	1×3"(75mm voice coil)
连接件	2×NEUTRIK NL4MP四芯插座, HF:2+ 2-, LF:1+ 1-	Connectors	2×NEUTRIK NL4MP, HF:2+ 2-, LF:1+ 1-
尺寸(H×W×D)	285.5×736×435mm	Dimension(H×W×D)	285.5×736×435mm
重量	33kg	Weight	33kg



广州市锐丰智能科技有限公司 A:广东省广州市番禺区市莲路石楼路段10号
T:020-3928 0043 F:020-39280123-8014 E:info@rfintell.com Z:511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10, Shilou Section, Shilian Road, Panyu District, Guangzhou, Guangdong, China
T:+86 2039280083 Mobile: +86 13609092324 F:+86-20-39280123-8014 E: mail:sales@rfintell.com Z:511447 www.rfintell.com